


**GENERAL NOTES**

1. CONSTRUCTION SHALL BE IN ACCORDANCE WITH COAL CREEK UTILITY DISTRICT STANDARD SPECIFICATIONS.
2. WHERE THE WATER MAIN CROSSES OVER SANITARY SEWER, THE MINIMUM VERTICAL SEPARATION SHALL BE 18 INCHES, OR CONSTRUCTION SHALL BE IN ACCORDANCE WITH D.O.E. CRITERIA FOR SEWAGE WORKS DESIGN (SEE DETAILS).
3. ALL SIDE SEWER TEES SHALL BE FIELD LOCATED
4. SECURE SIDE SEWER PERMITS FROM DISTRICT PRIOR TO INSTALLING SIDE SEWERS.
5. MANHOLE RING COVERS SHALL BE SLOPED TO MATCH THE GRADE OF THE STREET IN WHICH THEY ARE PLACED.
6. STREETS SHALL BE CONSTRUCTED TO SUBGRADE PRIOR TO INSTALLING THE SANITARY SEWERS.
7. SIDE SEWERS TO BE EXTENDED 10 FEET INTO THE LOTS.

**BASIS OF BEARING**  
 THE MONUMENTED CENTERLINE OF 116TH AVE SE AT BEARING OF S00°10'00"E

**SHEET INDEX**

SS01	COVER SHEET
SS02	SANITARY SEWER PLAN AND PROFILE
SS03	STANDARD NOTES
SS04	STANDARD DETAILS

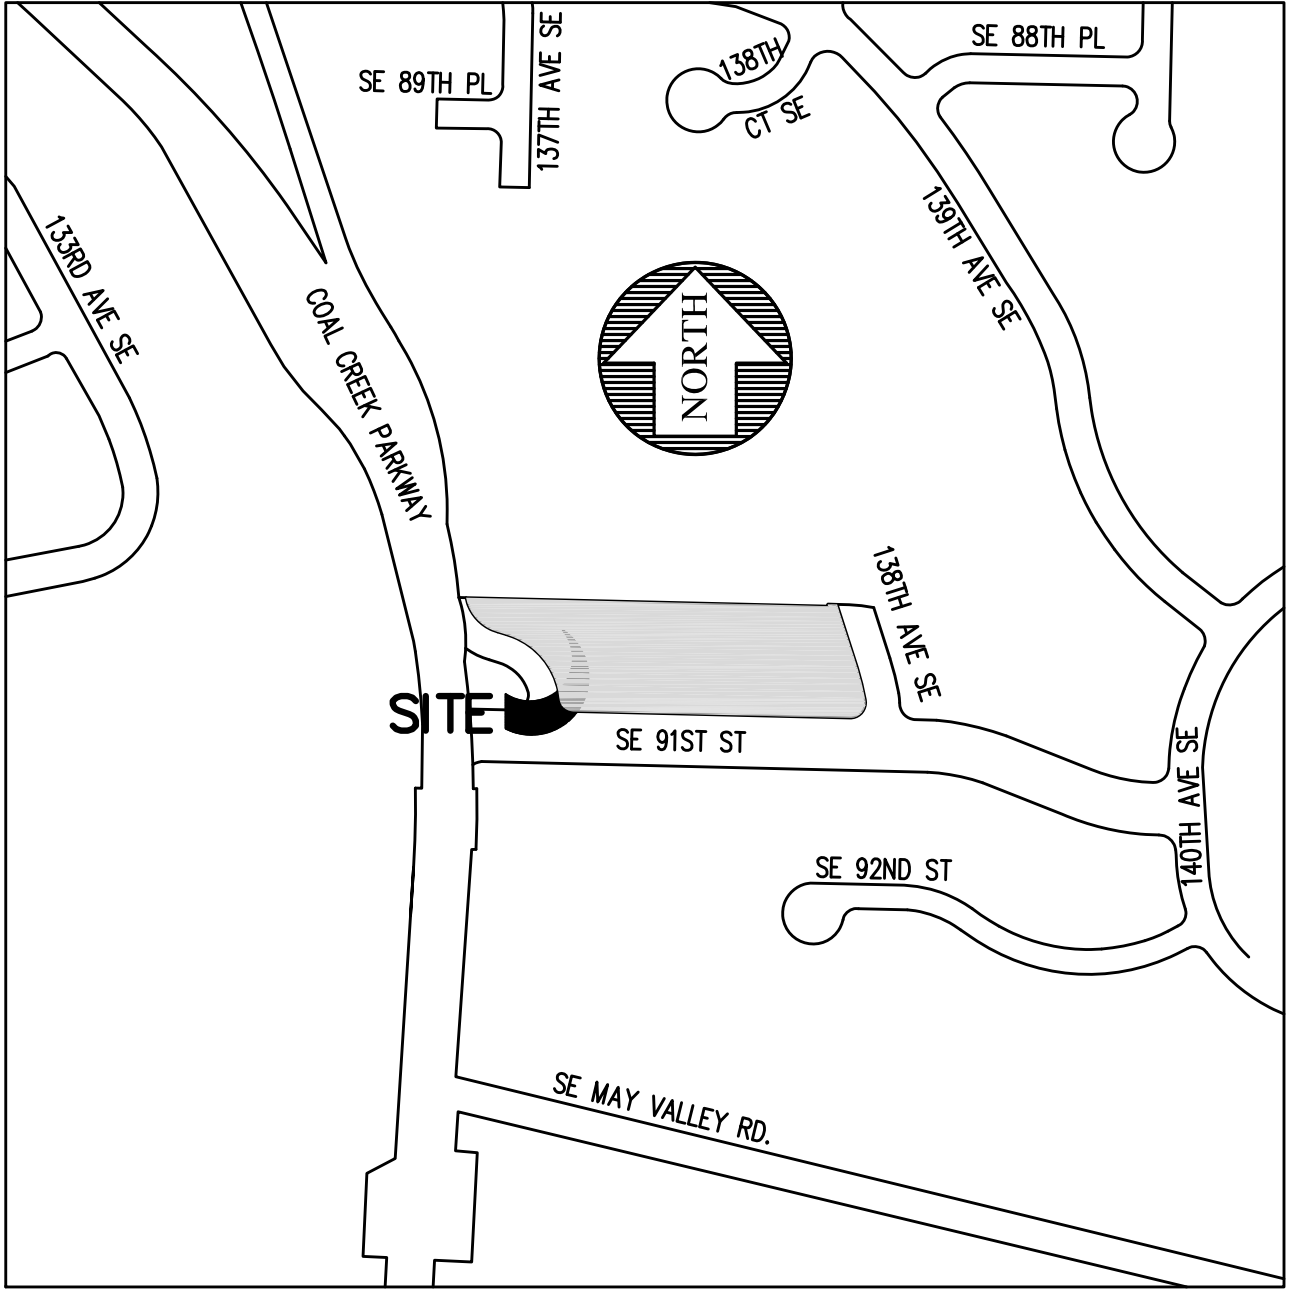

**VICINITY MAP**  
 N.T.S.

**CALL BEFORE YOU DIG**  
 Call: TOLL FREE  
 1-800-424-5555

FILE NAME (UPDATED BY) \_\_\_\_\_  
 DESIGN DATE & TIME \_\_\_\_\_  
 DRAWN \_\_\_\_\_  
 CHECKED \_\_\_\_\_

DESIGNED	DATE	BY	APP'D

**Pacific Engineering Design, LLC**  
 15445 53RD AVE. S. SEATTLE, WA 98188  
 PHONE: (206) 431-7970 FAX: (206) 388-1648 WEB SITE: PACENG.COM  
 Civil Engineering and Planning Consultants

**COAL CREEK UTILITY DISTRICT**  
 6801 132ND PLACE S.E.  
 NEWCASTLE, WASHINGTON 98059

REFERENCE INFORMATION	DATE
FIELD BOOK:	JUNE 27, 2007
SURV. CPU FILE:	SCALE
DATUM: NGVD29	NOTED

**TRACT J**

JOB NUMBER	?????.00
DWG NO.	07052CV-S01.DWG
SHEET	1 OF 4