

SW 1/4, SW 1/4 SEC. 20, T. 26 N., R. 5 E., W.M.

TESC NOTES





- FROM OCTOBER 1 TO APRIL 30, NO SOIL SHALL REMAIN UNSTABILIZED FOR MORE THAN 2 DAYS. FROM MAY 1 TO SEPTEMBER 30, NO SOILS SHALL REMAIN UNSTABILIZED FOR MORE THAN 7 DAYS. STABILIZE ALL SOILS, INCLUDING STOCKPILES THAT ARE TEMPORARILY EXPOSED. USE ONE OF THE FOLLOWING TO TEMPORARILY STABILIZE SOILS, INCLUDING STOCKPILES: E1.10 TEMPORARY SEEDING & MULCHING, E1.15 MATTING/ ROLLED EROSION CONTROL PRODUCTS, E1.20 PLASTIC COVERING OR E2.20 DUST CONTROL.
- AFTER CONSTRUCTION BUT BEFORE PROJECT IS CONSIDERED COMPLETED, PERMANENTLY STABILIZE ALL EXPOSED SOILS THAT HAVE BEEN DISTURBED DURING CONSTRUCTION. USE ONE OF THE FOLLOWING TO PERMANENTLY STABILIZE SOILS: E1.35 PERMANENT SEEDING OR PLANTING, E1.40 SODDING.
- USE ONE OF THE FOLLOWING TO PREVENT THE TRANSPORT OF SEDIMENT FROM THE SITE: E3.10 FILTER FENCE, E3.15 STRAW BALE BARRIER, E3.20 BRUSH BARRIER, E3.25 GRAVEL FILTER BERM, E3.40 SEDIMENT POND OR E3.35 SEDIMENT TRAP. SANDBAGS MAY ALSO BE UTILIZED TO PREVENT SEDIMENT FROM BEING DISCHARGED OFFSITE. RETAINING NATURAL VEGETATION AND BUFFER ZONES ARE ENCOURAGED, BUT MAY NOT BE USED AS A SUBSTITUTE.
- PREVENT SEDIMENT FROM ENTERING ALL STORM DRAINS, INCLUDING DITCHES THAT RECEIVE RUNOFF FROM THE DISTURBED AREA, BY INSTALLING STORM DRAIN INLET INSERTS, USING SANDBAGS AND VACUUMING SEDIMENT FROM IMPERVIOUS SURFACES.
- DURING CONSTRUCTION, PREVENT THE INTRODUCTION OF POLLUTANTS IN ADDITION TO SEDIMENT INTO STORMWATER. COMPLY WITH THE REQUIREMENTS FOR EACH OF THE FOLLOWING CONSTRUCTION RELATED ACTIVITIES: C1.10 PESTICIDE CONTROL, C1.20 HANDLING PETROLEUM PRODUCTS, C1.30 NUTRIENT APPLICATION, C1.40 SOLID WASTE HANDLING/DISPOSAL OR C1.50 USE OF CHEMICALS DURING CONSTRUCTION.
- LIMIT CONSTRUCTION VEHICLE ACCESS, WHENEVER POSSIBLE, TO ONE LOCATION. STABILIZE ALL ACCESS POINTS. PROVIDE PERIODIC STREET CLEANING BY SWEEPING OR SHOVELING ANY SEDIMENT THAT MAY HAVE BEEN TRACKED OUT. PLACE SEDIMENT IN A SUITABLE DISPOSAL AREA WHERE IT WILL NOT ERODE AGAIN. E2.10 CONSTRUCTION ACCESS OR E2.15 CONSTRUCTION ROAD STABILIZATION.
- INSPECT AND MAINTAIN REQUIRED EROSION CONTROLS TO ENSURE CONTINUED PERFORMANCE OF THEIR INTENDED FUNCTION.
- STREET USE PERMIT SHALL BE OBTAINED FROM SDOT FOR TEMPORARY DRAINAGE DISCHARGE, SIDEWALK CLOSURE AND/OR MATERIAL STORAGE IN STREET AND/OR ALLEY RIGHT-OF-WAY.

MATERIALS AT JOB SITE

- CONSTRUCTION EROSION CONTROL MEASURES MUST BE IN PLACE AND APPROVED BY DPD BEFORE ANY EARTH DISTURBANCE. CALL (206) 684-8860 TO SCHEDULE AN INSPECTION FOR THIS ITEM.
- NO SEDIMENT SHALL BE TRACKED ONTO PAVED STREETS OR ROADWAYS. SEDIMENT SHALL BE REMOVED FROM TRUCKS AND EQUIPMENT BEFORE LEAVING THE CONSTRUCTION SITE. IN THE EVENT OF FAILURE OF THE TESC SYSTEM RESULTING IN SEDIMENT TRACKING ONTO PAVEMENT, THE CONTRACTOR SHALL IMPLEMENT MEASURES IMMEDIATELY TO CORRECT THE SITUATION.
- THE CONTRACTOR SHALL EMPLOY EMERGENCY MEASURES TO REMOVE SEDIMENT FROM PAVED SURFACES, AS NEEDED. STREET SWEEPING SHALL BE CONSIDERED AN EMERGENCY MEASURE AND NOT A BASIC COMPONENT OF THE TESC SYSTEM. SEDIMENT TRACKED ONTO PAVED SURFACES SHALL NOT BE WASHED INTO STORM DRAINS OR OTHER UTILITY INLETS.

CONSTRUCTION SEQUENCE


- PRE-CONSTRUCTION MEETING.
- POST NOTICE OF CONSTRUCTION ACTIVITY SIGN WITH NAME AND PHONE NUMBER OF ESC SUPERVISOR.
- FLAG OR FENCE CLEARING LIMITS.
- INSTALL CATCH BASIN PROTECTION AS REQUIRED.
- GRADE AND INSTALL CONSTRUCTION ENTRANCE.
- INSTALL PERIMETER PROTECTION (SILT FENCE).
- CONSTRUCT SURFACE WATER CONTROLS (INTERCEPTOR DIKES, PIPE SLOPE DRAINS, ETC.) SIMULTANEOUSLY WITH CLEARING AND GRADING FOR PROJECT DEVELOPMENT.
- MAINTAIN EROSION CONTROL MEASURES IN ACCORDANCE WITH CITY OF SEATTLE STANDARDS AND MANUFACTURER'S RECOMMENDATIONS.
- RELOCATE EROSION CONTROL MEASURES OR INSTALL NEW MEASURES SO THAT AS SITE CONDITIONS CHANGE THE EROSION AND SEDIMENT CONTROL IS ALWAYS IN ACCORDANCE WITH THE CITY OF SEATTLE EROSION AND SEDIMENT CONTROL STANDARDS.
- COVER ALL AREAS THAT WILL BE UNWORKED FOR MORE THAN SEVEN DAYS DURING THE DRY SEASON OR TWO DAYS DURING THE WET SEASON WITH STRAW, WOOD FIBER MULCH, COMPOST, PLASTIC SHEETING OR EQUIVALENT.
- STABILIZE ALL AREAS THAT REACH FINAL GRADE WITHIN SEVEN DAYS.
- SEED OR SOD ANY AREAS TO REMAIN UNWORKED FOR MORE THAN 30 DAYS.
- UPON COMPLETION OF THE PROJECT, ALL DISTURBED AREAS MUST BE STABILIZED AND BEST MANAGEMENT PRACTICES REMOVED IF APPROPRIATE.

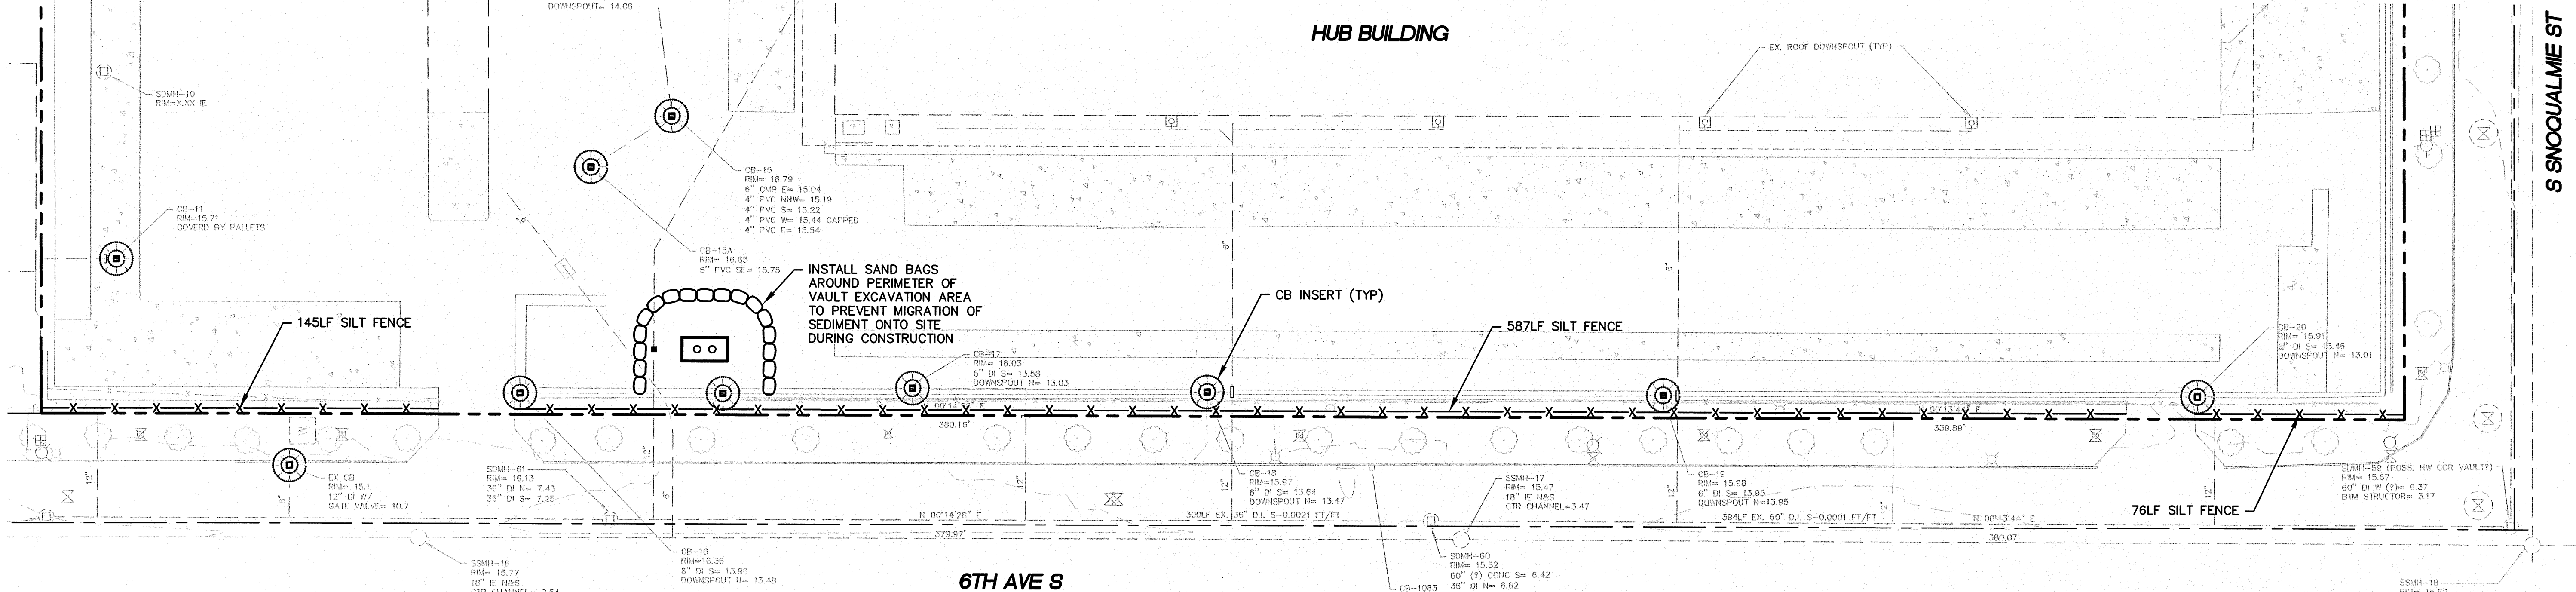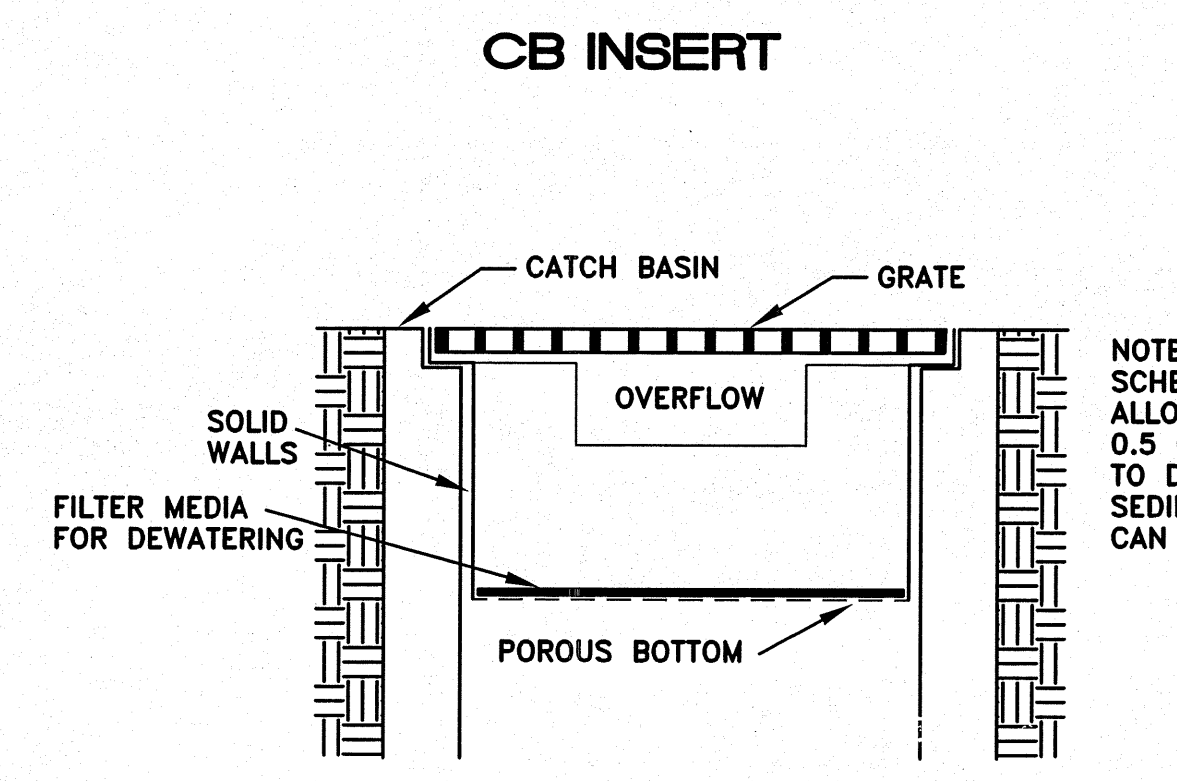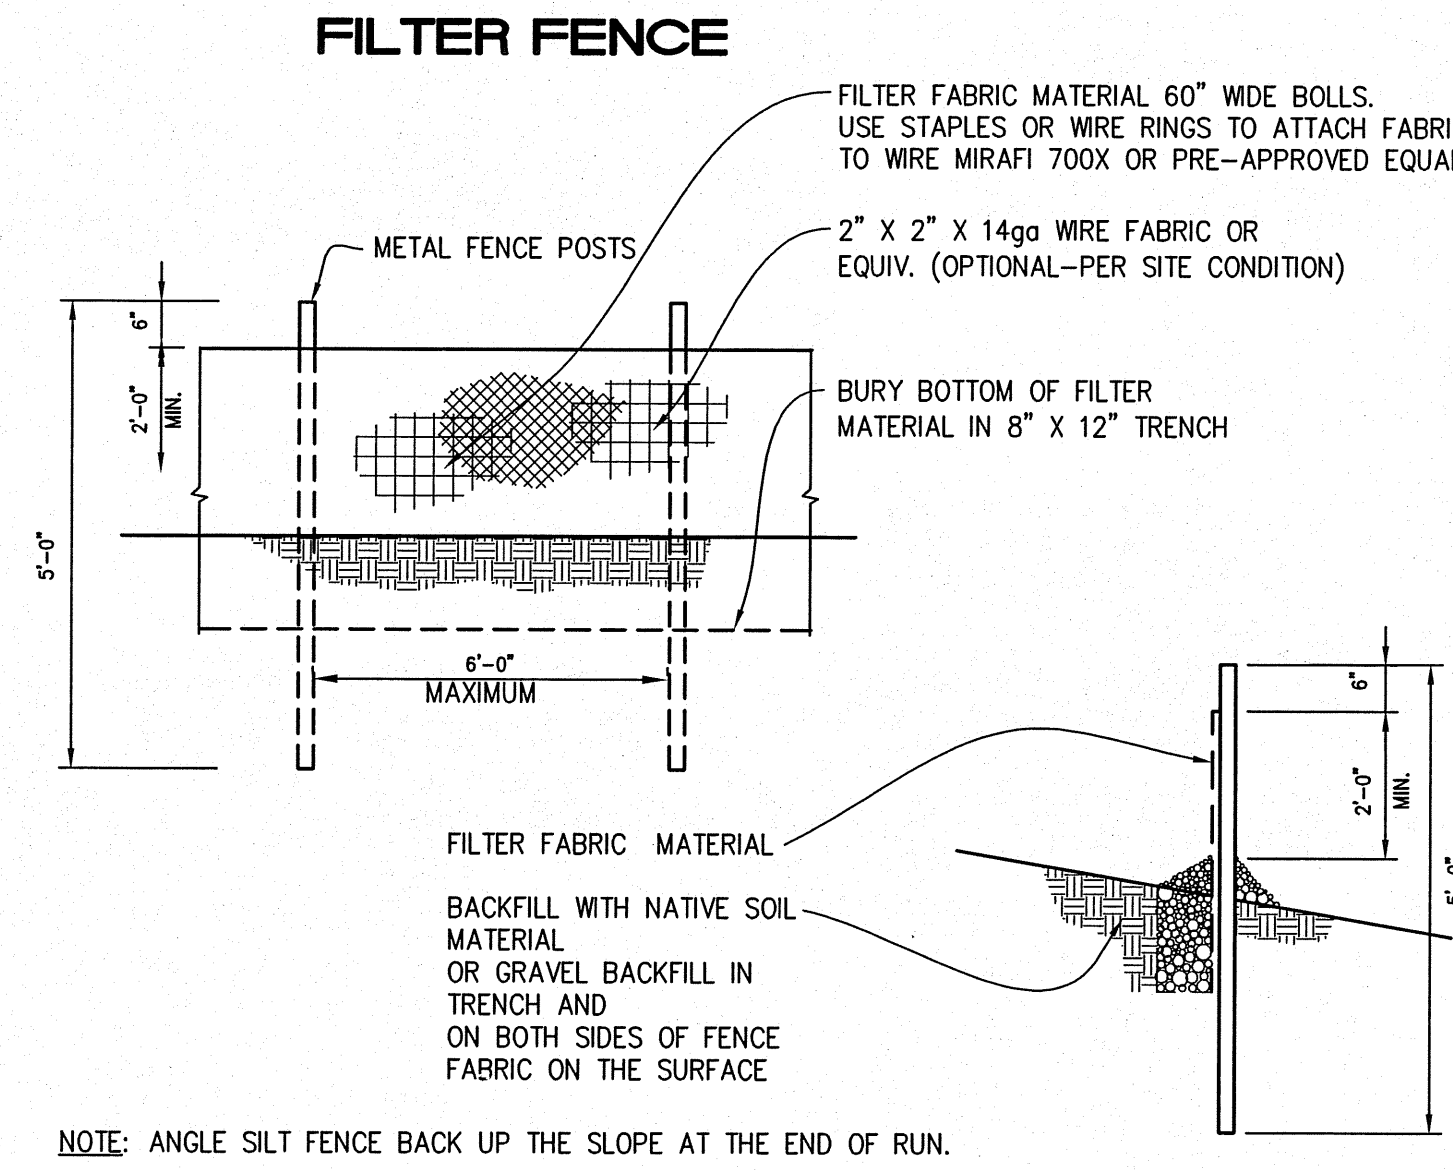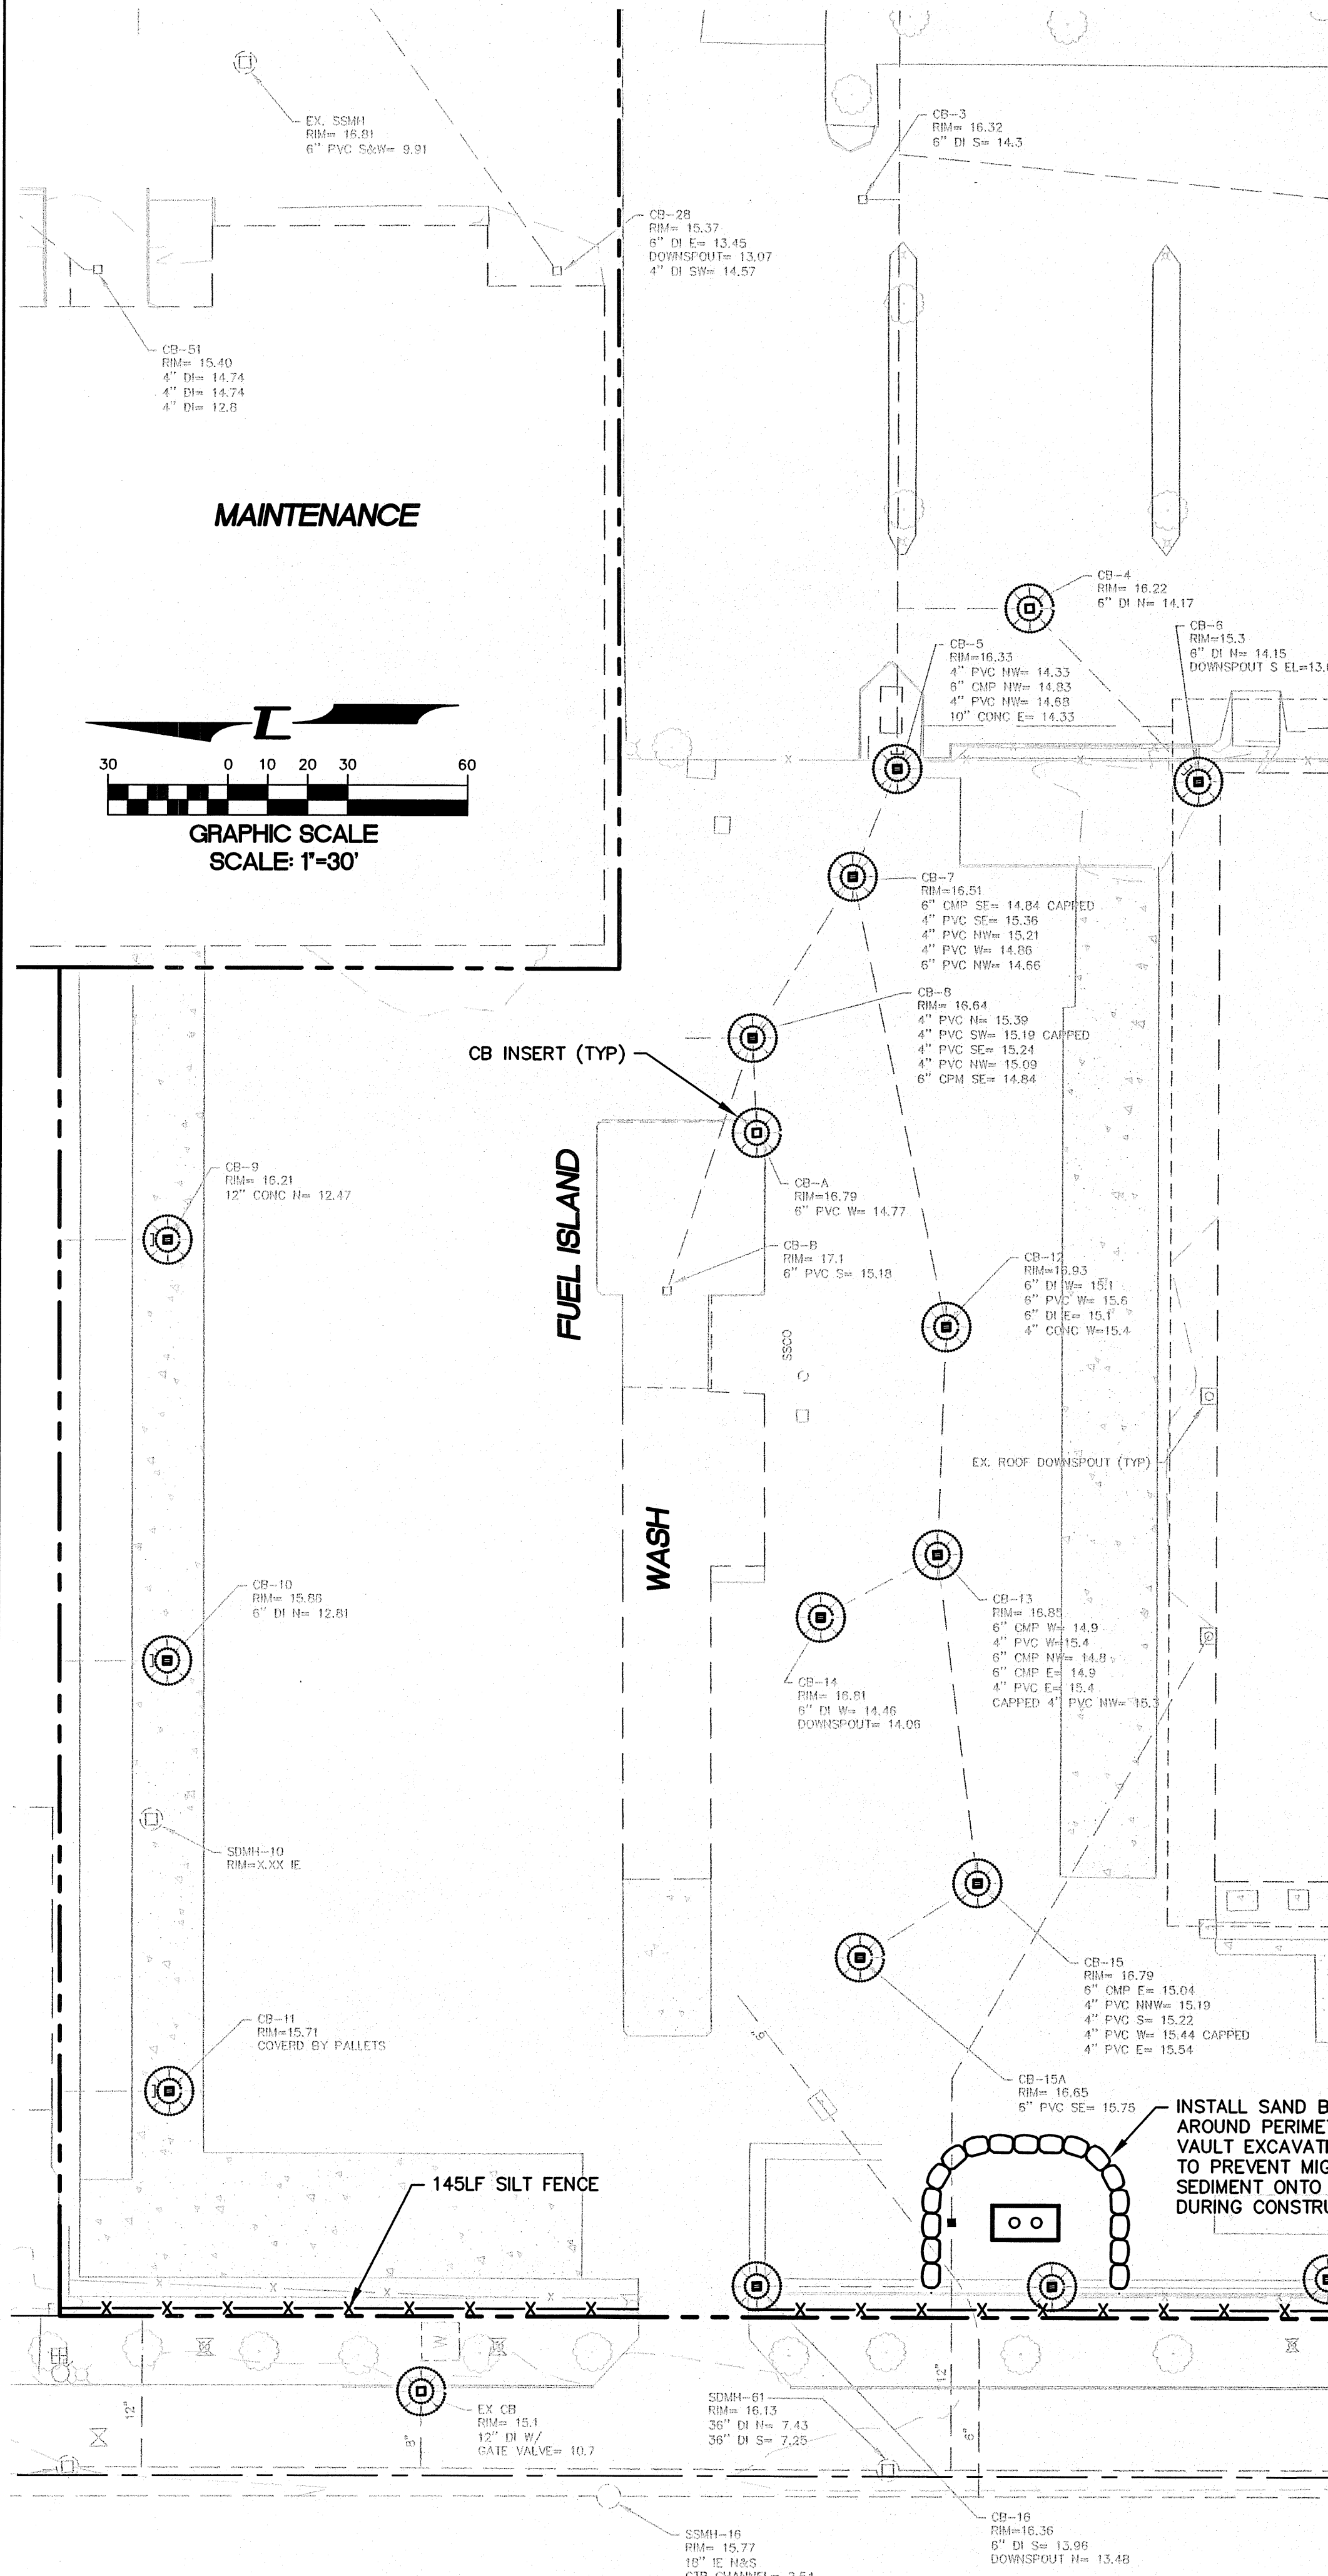

PRELIMINARY

6TH AVE S

S SNOQUALMIE ST

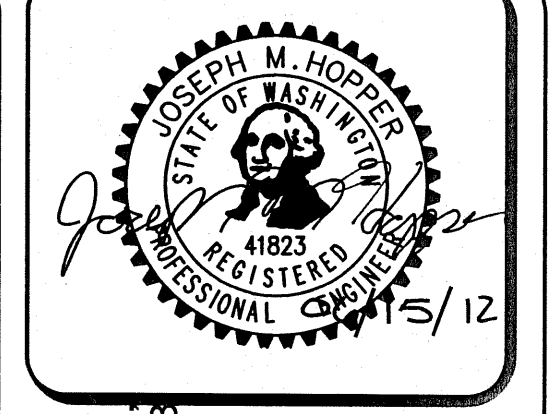

15445 63RD AVE. S.
SEATTLE, WA 98188
PHONE: (206) 431-7970
FAX: (206) 388-1648
WEB SITE: PACENG.COM

Pacific Engineering Design, LLC
Civil Engineering and Planning Consultants

UPS - SEATTLE HUB
CITY OF SEATTLE, WA
FOR: UNITED PARCEL SERVICE
4485 7TH AVE. S.
SEATTLE, WA 98108

PROJECT NO.: 11057
DRAWN BY: ENM
ISSUE DATE: 6/15/2012
SHEET REV.:

TEMPORARY EROSION CONTROL PLAN

11057E01.DWG
C02
SHEET 02 OF 08